
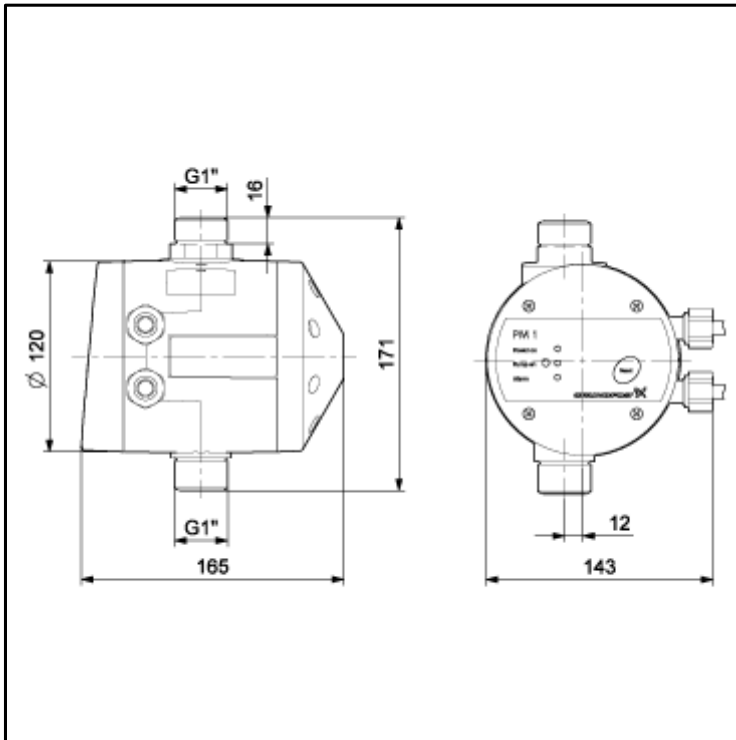


Position	Qty.	Description	Single Price
	-1	<p><b>PM</b>                      Product No.: 96848670</p> <p>The Grundfos PM 1 pressure manager is designed for automatic start/stop control of Grundfos pumps and other water supply pumps.                      The PM 1 is suitable for applications where start/stop of the pump according to consumption is needed. It is the basic control solution offering start at 1.5 bar bar. The PM 1 starts the pump when the start pressure is reached, and the pump keeps running as long as there is a flow.                      The PM 1 offers dry-running protection and cycling alarm for increased safety.</p> <p><b>Liquid:</b>                      Liquid temperature range: 0 .. 40 °C</p> <p><b>Technical:</b>                      Maximum operating pressure: 10 bar                      Approvals and markings: CE VDE ACS C-TICK GOST</p> <p><b>Installation:</b>                      Maximum ambient temperature: 50 °C                      Maximum operating pressure: 10 bar                      Inlet connect: G1"                      Outlet connect: G1"                      Inlet thread: External                      Outlet thread: External                      Pres. Read-out: NO</p> <p><b>Electrical data:</b>                      Maximum current consumption: 6 A                      Max. power input: 1200 W                      Mains frequency: 50 Hz                      Rated voltage: 1 x 220-240 V                      Enclosure class (IEC 34-5): 65</p> <p><b>Tank:</b>                      Volume of pressure tank: NO I</p> <p><b>Others:</b>                      Net weight: 0.89 kg                      Gross weight: 1.65 kg</p>	On request

Position	Qty.	Description	Single Price
	-1	<p><b>PM</b></p>  <p><b>Note! Product picture may differ from actual product</b></p> <p>Product No.: 96848670</p> <p>The Grundfos PM 1 pressure manager is designed for automatic start/stop control of Grundfos pumps and other water supply pumps. The PM 1 is suitable for applications where start/stop of the pump according to consumption is needed. It is the basic control solution offering start at 1.5 bar bar. The PM 1 starts the pump when the start pressure is reached, and the pump keeps running as long as there is a flow. The PM 1 offers dry-running protection and cycling alarm for increased safety.</p> <p><b>Liquid:</b>                  Liquid temperature range: 0 .. 40 °C</p> <p><b>Technical:</b>                  Maximum operating pressure: 10 bar                  Approvals and markings: CE VDE ACS C-TICK GOST</p> <p><b>Installation:</b>                  Maximum ambient temperature: 50 °C                  Maximum operating pressure: 10 bar                  Inlet connect: G1"                  Outlet connect: G1"                  Inlet thread: External                  Outlet thread: External                  Pres. Read-out: NO</p> <p><b>Electrical data:</b>                  Maximum current consumption: 6 A                  Max. power input: 1200 W                  Mains frequency: 50 Hz                  Rated voltage: 1 x 220-240 V                  Enclosure class (IEC 34-5): 65</p> <p><b>Tank:</b>                  Volume of pressure tank: NO I</p> <p><b>Others:</b>                  Net weight: 0.89 kg                  Gross weight: 1.65 kg</p>	On request



96848670 PM 1 50 Hz



Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



Company name: -  
Created by: -  
Phone: -  
Fax: -  
Date: -

---

**Order Data:**

**PM 1**

Amount -1  
Product No 96848670  
Price On request

Total: Price on request