
427B Sprinkler



A plastic impact sprinkler, specifically designed for irrigation of field edges

4257B AG-U, 427B AG, 427B GAG Impact Sprinkler

- Integrated stream-straightening vane for maximum range
- High-impact, heavy-duty plastic materials provide resistance to corrosion, chemicals and UV radiation
- WP - Hammer ensures all water is inside the irrigation pattern and prevents irrigating roads and neighbors


Rivulis

www.rivulis.com

427B Sprinkler Series - plastic impact sprinkler, specifically designed for irrigation of field edges.

Available models for agriculture and landscape applications.

IrriStand systems
Plastic impact sprinkler 1/2" male or 3/4" female mounted on IrriStand 52 or Elite



427B AG-U


Performance Table

Nozzle color (mm)	P (bar)	Q (m^3/h)	D (m)
2.8 Orange	2.0	0.450	22
	3.0	0.550	23
	4.0	0.630	24

Performance table prepared under laboratory conditions
For windy conditions use closer spacing

Connectors & Accessories for IrriStand 52

Description	
Adaptor for IrriStand 52	
Universal LPD 1/2"	
Male connector	
Female connector	
Plug	
Elbow connector	
Quick Drill 7.5mm	
7.5 mm Punch & Pusher	

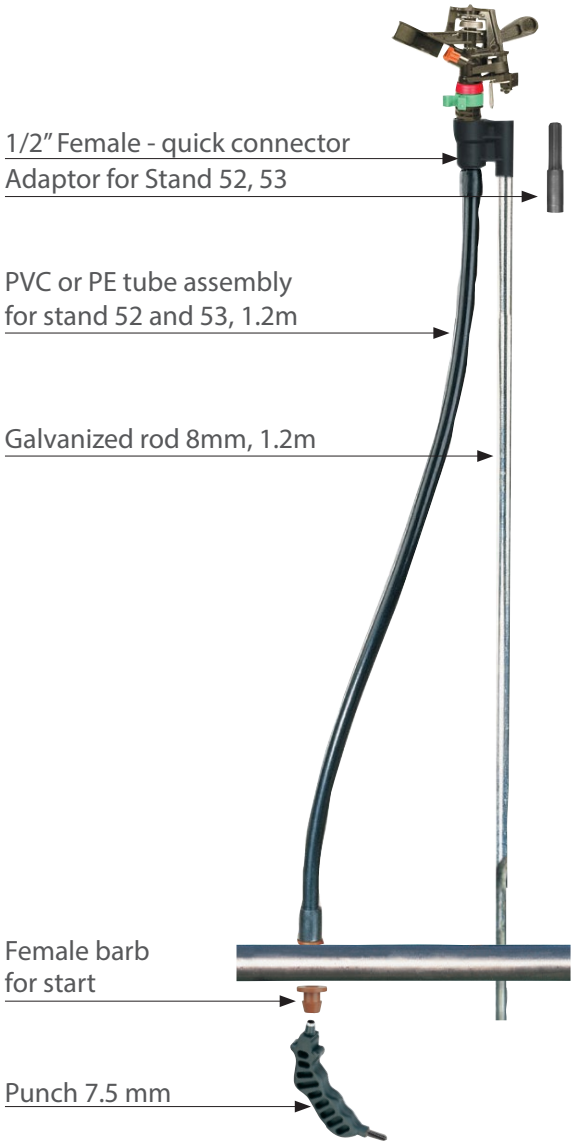

Performance Table

Nozzle color (mm)	P (bar)	Q (m^3/h)	D (m)
3.0 Red	2.0	0.510	23
	3.0	0.630	24
	4.0	0.720	25
3.2 Green	2.0	0.570	23
	3.0	0.700	24
	4.0	0.810	26
3.5 Blue	2.0	0.660	23
	3.0	0.810	24
	4.0	0.930	26
4.0* Black	2.0	0.850	24
	3.0	1.030	26
	4.0	1.180	26

Performance table prepared under laboratory conditions
For windy conditions use closer spacing
* standard model



427B AG



Sprinkler with radius limitation for precision irrigation

Plastic impact sprinkler

1/2" male or 3/4" female mounted on Elite



427B GAG

Performance Table

Nozzle color (mm)	P (bar)	Q (m^3/h)	D (m)
2.8 Orange	2.0	0.450	23
	3.0	0.550	23
	4.0	0.630	24
3.0 Red	2.0	0.510	23
	3.0	0.630	24
	4.0	0.720	25
3.2 Green	2.0	0.570	23
	3.0	0.700	24
	4.0	0.810	26
3.5 Blue	2.0	0.660	23
	3.0	0.810	24
	4.0	0.930	26
4.0* Black	2.0	0.850	24
	3.0	1.030	26
	4.0	1.180	26

Performance table prepared under laboratory conditions
For windy conditions use closer spacing
* standard model

427B Sprinkler



Case study outcomes are for information purposes only and actual results may vary. This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of Rivulis products. Because some products are not available in all regions, please contact your local dealer for details. Rivulis reserves the right to change specifications and the design of all products without notice. Every effort has been used to ensure that product information, including data sheets, schematics, manuals and brochures are correct. However information should be verified before making any decisions based on this information.