B Science. Applied to Life.™

3M[™] Scotchlok[™] 314 Insulation Displacement Connectors (IDC's).

For moisture-resistant applications rated at 600 volts for building wires and 1000 volts for signs, fixtures, and luminaires.




Features and benefits

- Moisture resistant seal is ideal for outdoor use
- Self-stripping quick and easy to use simply snap shut without stripping or twisting the wire
- Connects 2 or 3 wire ends and insulates the connection
- Unique "U" contact provides a dependable electrical connection

Typical applications

Sprinkler systems, landscape lighting and other moisture resistant applications at low voltage.

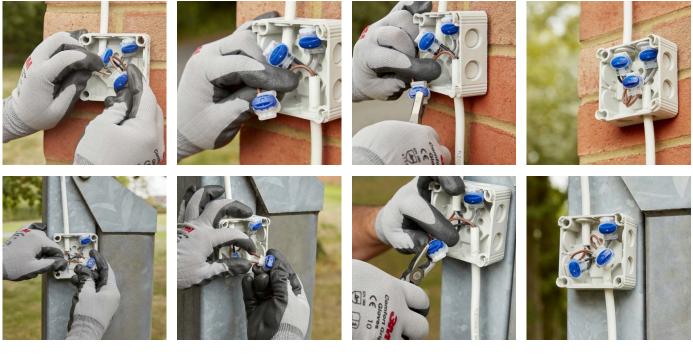

Product details

Wire range, mm ²	Wire types	Operating temperature	Flame retardant	Certifications
0,5 – 1,5	Solid or stranded, tinned or untinned copper conductors	105ºC	Yes	UL Listed, CSA Certified, VDE Certified, CE Approved, RoHS 2011/65/EU Compliant

For more information on this and other 3M electrical products visit: **3M.co.uk/electrical**

Electrical Markets Division 3M United Kingdom PLC 3M Centre Cain Road, Bracknell Berkshire RG12 8HT www.3M.co.uk/electrical

3M Ireland Limited

The Iveagh Building The Park Carrickmines Dublin 18

Please recycle. Printed in the UK. © 3M 2018. 3M and Scotchlok are trademarks of the 3M company. All rights reserved. J441366

