

*Putting Water Where it Counts!®*



# CETA®

## Pressure Compensating Emitter

Made in Australia

[antelco.com](http://antelco.com)

# CETA® Pressure Compensating Emitter

A take apart pressure compensating dripper incorporating a turbulent flow path and diaphragm for uniform flow rates over a wide range of operating pressures.

## Features


- Take apart for easy inspection and cleaning.
- Self-flushing action at low pressure.
- Anti-insect baffle to reduce risk of blockages.
- Spike & In-Line Spike models to anchor CETA® at the plant root.
- 4 mm barbed inlet dripper with colour coded bases.
- Constructed of high quality UV, chemical & fertiliser resistant materials.
- Low manufacturing coefficient of variation (Cv) provides high performance (conforms to ISO 9261).



CETA® PC Spike  
Inlet/Outlet 4 mm




CETA® PC In-Line Spike  
Inlet/Outlet 4 mm

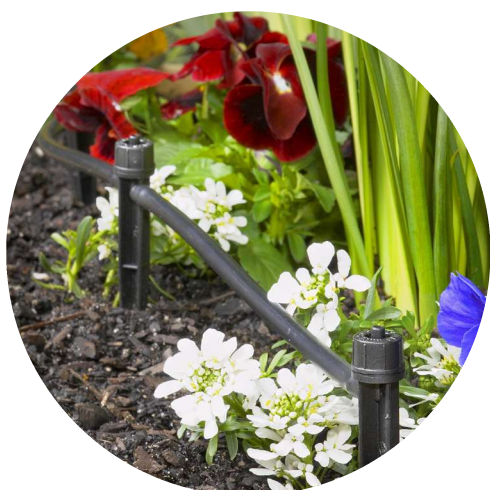

## Applications

Pots, planter boxes, balcony, patios and landscape.

## Flow Rate

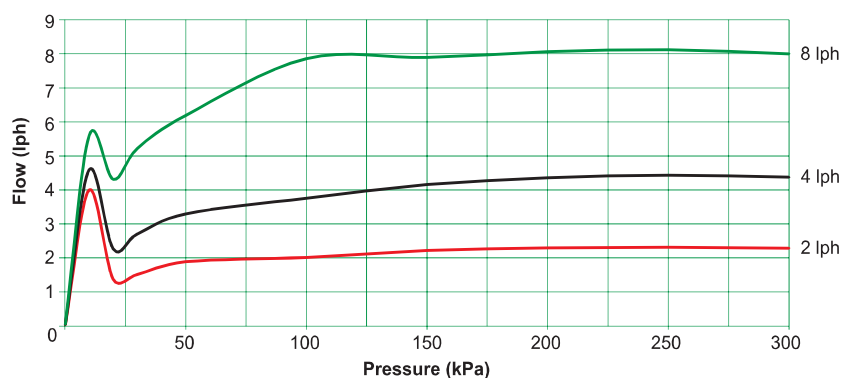

## Specifications

|                        |                                     | CETA® PC Barbed Outlet                                      | CETA® PC Spike, In-Line Spike, Spout Outlet       |
|------------------------|-------------------------------------|-------------------------------------------------------------|---------------------------------------------------|
| UV STABILISED MATERIAL | BASE/SPIKE CAP<br>DIAPHRAGM ADAPTOR | polypropylene<br>polypropylene<br>silicone rubber<br>acetal | polypropylene<br>polypropylene<br>silicone rubber |
| CONNECTION TYPE:       | INLET<br>OUTLET                     | barb 4 mm<br>barb 3 mm or 4 mm                              | barb 4 mm<br>spout 4 mm                           |

## Performance Chart

| Pressure (kPa)                      | Flow (lph) |           |           |
|-------------------------------------|------------|-----------|-----------|
|                                     | 2 lph      | 4 lph     | 8 lph     |
| 50                                  | 1.9        | 3.3       | 6.2       |
| 100                                 | 2.0        | 3.8       | 7.9       |
| 150                                 | 2.2        | 4.2       | 7.9       |
| 200                                 | 2.3        | 4.4       | 8.1       |
| 250                                 | 2.3        | 4.4       | 8.1       |
| 300                                 | 2.3        | 4.4       | 8.0       |
| 350                                 | 2.2        | 4.3       | 7.8       |
| MINIMUM FLOW<br>PATH DIMENSION (MM) | 0.7 x 0.6  | 0.8 x 0.8 | 1.2 x 0.9 |



## Ordering Information - CETA® PC Spike

| Description         | Order Code | Pack Quantity | Packs Per Carton | Carton (kg) |
|---------------------|------------|---------------|------------------|-------------|
| Spike 2 lph         | 30615      | 25            | 60               | 9.0         |
| Spike 4 lph         | 30625      | 25            | 60               | 9.0         |
| Spike 8 lph         | 30635      | 25            | 60               | 9.0         |
| In-Line Spike 2 lph | 30645      | 25            | 50               | 7.7         |
| In-Line Spike 4 lph | 30655      | 25            | 50               | 7.7         |
| In-Line Spike 8 lph | 30665      | 25            | 50               | 7.7         |

NEW

NEW

NEW

CETA® PC 2 lph



Spout Outlet

Barbed Outlet

## Ordering Information - CETA® PC Spout Outlet

| Description      | Order Code | Pack Quantity | Packs Per Carton | Carton (kg) |
|------------------|------------|---------------|------------------|-------------|
| 2 lph Red Base   | 30425      | 100           | 70               | 13.3        |
| 4 lph Black Base | 30445      | 100           | 70               | 13.3        |
| 8 lph Green Base | 30485      | 100           | 70               | 13.3        |

CETA® PC 4 lph



Spout Outlet

Barbed Outlet

## Ordering Information - CETA® PC Barbed Outlet

| Description                            | Order Code | Pack Quantity | Packs Per Carton | Carton (kg) |
|----------------------------------------|------------|---------------|------------------|-------------|
| 2 lph Red Base w/ 3 mm Barbed Outlet   | 30515      | 100           | 60               | 13.5        |
| 4 lph Black Base w/ 3 mm Barbed Outlet | 30525      | 100           | 60               | 13.5        |
| 8 lph Green Base w/ 3 mm Barbed Outlet | 30535      | 100           | 60               | 13.5        |
| 2 lph Red Base w/ 4 mm Barbed Outlet   | 30545      | 100           | 60               | 13.5        |
| 4 lph Black Base w/ 4 mm Barbed Outlet | 30555      | 100           | 60               | 13.5        |
| 8 lph Green Base w/ 4 mm Barbed Outlet | 30565      | 100           | 60               | 13.5        |

NEW

NEW

NEW

CETA® PC 8 lph



Spout Outlet

Barbed Outlet

## Ordering Information - Locating Drip Spike NEW

| Type                                     | Order Code | Pack Quantity | Packs Per Carton | Carton (kg) |
|------------------------------------------|------------|---------------|------------------|-------------|
| Locating Drip Stake (suits 3mm/4mm tube) | 43605      | 25            | TBA              | TBA         |

Antelco Group of Companies

**LINCOLN**  
— Est. 1959 —  
MOULDING THE FUTURE

 **ANTELCO®**

*Dawn*



**Antelco Australia**  
Antelco Pty Ltd ABN 50 008 062 708  
Sales & Marketing,  
Orders & Warehouse  
Research & Development  
PO Box 95, 131 Tolley Rd,  
St Agnes SA 5097 Australia  
+61 8 8334 4333  
adelaide@antelco.com.au

**Antelco USA**  
Antelco Corporation  
Sales & Marketing,  
Orders & Warehouse  
886 Waterway Pl,  
Longwood,  
Florida 32750 USA  
+1 407 331 0699  
info@antelco.com

**Antelco Europe**  
Antelco UK Limited  
Sales & Marketing,  
Orders & Warehouse  
17a Chartmoor Rd,  
Leighton Buzzard,  
Bedfordshire LU7 4WG UK  
+44 152 585 9990  
orders@antelco.co.uk